



FIRE SUPPRESSION

Fire suppression for all levels
of racing and motorsport



Photograph for illustration purposes

Foam Hand-Held Installation Manual

Model Number: **FE-900HH** / Part Number: **100.200.001**

Model Number: **FE-175HH** / Part Number: **100.200.008**

Model Number: **FE-900HH-SILVER** / Part Number: **100.200.003**

Model Number: **FE-240HH** / Part Number: **100.200.027**

Model Number: **FE-900HH- BLACK** / Part Number: **100.200.004**

This is a Foam based hand-held fire extinguisher. To maintain optimum performance all hand-held fire extinguishers should be serviced every two years by the manufacturer or an FEV approved service agent – please see website for details.

Please read the following before commencing any installation.

1. This manual should be read and understood before starting installation.
2. The components supplied should be used in accordance with the installation and any advice FEV provide. If you do not comply with the instructions or any such advice, without limitation, any warranty may be invalidated.
3. This product should be returned every 2 years from date of last service to FEV or an approved service agent, for a complete check and service – and re-certification for a further 2 years.



Kit Contents

Qty	Description	Part Number	
1	0.9ltr afff foam handheld	100.200.001	Complete with bracket and straps
	0.9ltr afff foam handheld - Silver	100.200.003	
	0.9ltr afff foam handheld - Black	100.200.004	
	1.75ltr afff foam handheld	100.200.008	
	2.4ltr afff foam handheld	100.200.027	
1	0.9ltr wire bracket	100.300.001	Spares
	1.75ltr wire bracket	100.300.002	
	2.4ltr wire bracket	100.300.004	
1	0.9ltr straps	100.500.001	
	1.75ltr straps	100.500.002	
	2.4ltr straps	100.500.004	

Installation Instructions


- 1. Cradle** – Take the hand-held fire extinguisher out of the wire bracket, if straps are supplied, place under the wire bracket and then bolt the fire extinguisher bracket to the vehicle structure **SECURELY**.
- 2. Handheld Bottle** – Position handheld bottle back into wire bracket and secure using both straps.

THIS IS A SAFETY ITEM! - Check your installation carefully! If in doubt, please ask!

Please Note

FEV FIA approved Foam Handhelds are tested and rated for a temperature operation range of –10°C to +60°C in accordance with FIA. Users should ensure that where high temperatures are anticipated adequate provision is made to locate the hand-held fire extinguisher away from high temperature sources, and if necessary fit reflective insulation around the cylinder. Do not place the fire extinguisher behind the car windscreens and ensure it is not in direct sunlight

BEFORE EVERY EVENT CHECK THE NOZZLE IS CLEAN AND THAT THE PRESSURE GAUGE IS IN THE GREEN ZONE. IF THE PRESSURE GAUGE IS NOT IN THE GREEN ZONE, PLEASE REMOVE FROM SERVICE AND RETURN TO THE MANUFACTURER OR AN FEV APPROVED SERVICE AGENT – THANK YOU

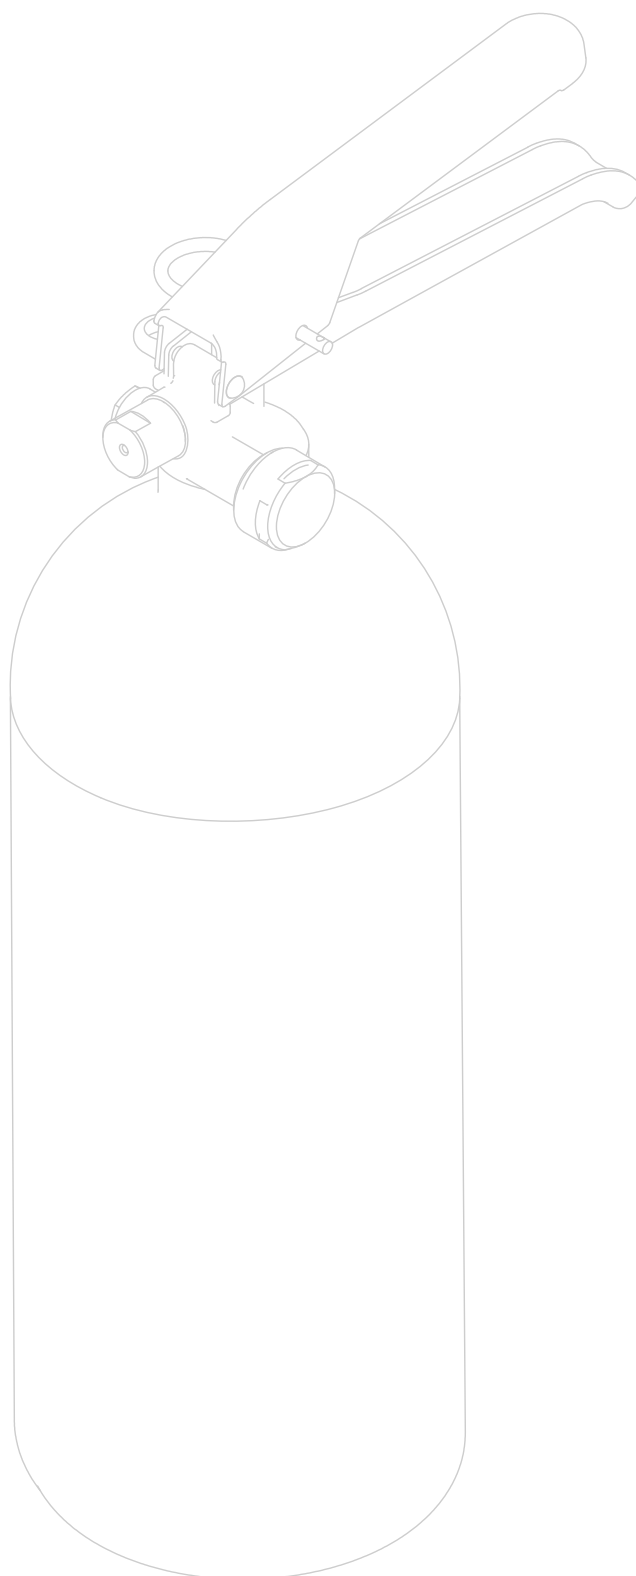

Fire Extinguisher Valve Company Ltd
Unit B3 Ford Airfield Industrial Estate
Ford, West Sussex. BN18 0HY

Tel: 01243 555566
Email: sales@f-e-v.co.uk

www.f-e-v.co.uk