






Racing Specialities

OPERATION INSTRUCTIONS FOR THE Arai GP-6S


READ THESE INSTRUCTIONS BEFORE USE!

TO FASTEN CHINSTRAP

For proper fastening the chinstrap must be routed through the D-rings as illustrated, and pulled through them securely for a snug fit.

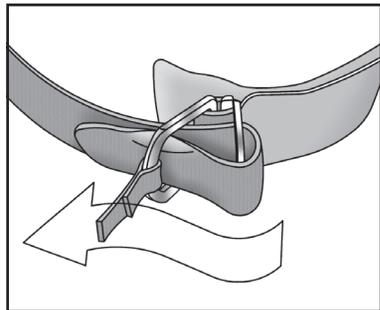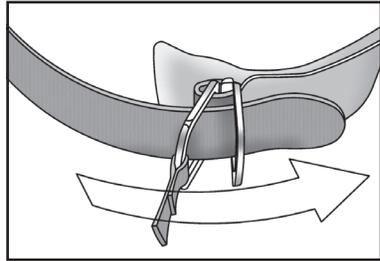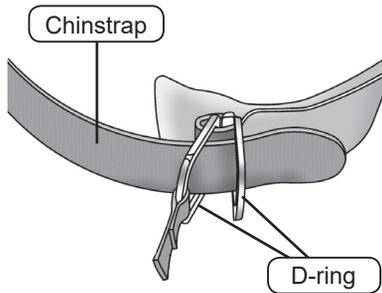


A D-ring release tab is provided to make loosening of the strap easier, simply pull as illustrated.

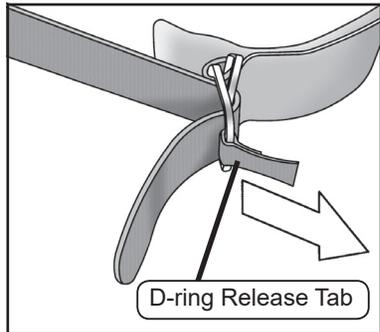


TO OPERATE FACE SHIELD


To open the shield, push up the shield lock release lever to release the lock system.

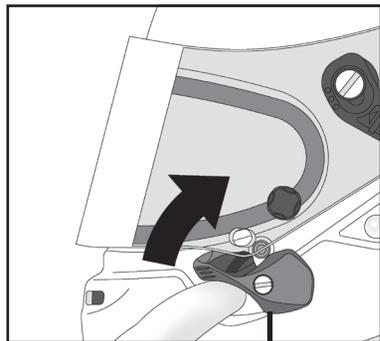


Then raise the shield. The shield can only be opened when the lock system has been so released.

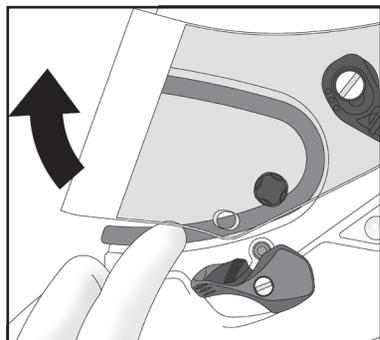


To close the shield, push down the shield until it is locked in place.

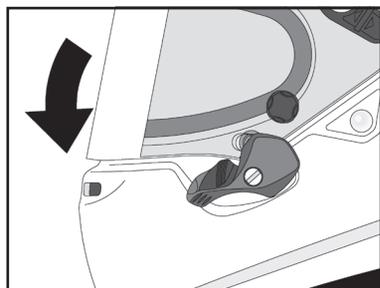

To remove the shield, remove screws, washers and guides from the helmet. To replace, position the shield in place and install guides, washers and screws as illustrated.

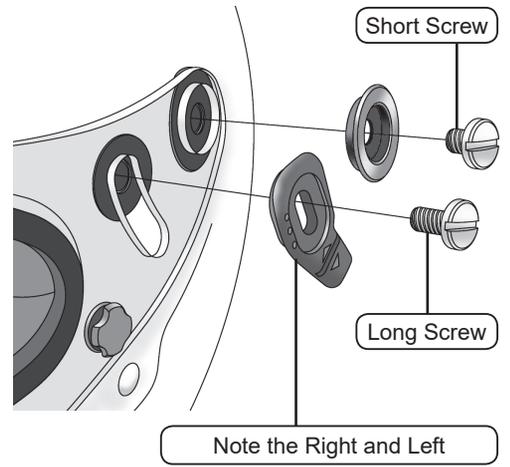


Tear-Off posts are standard equipment. To install the Tear-Off, some Tear-Offs come with protective film on one or both sides. Be sure to remove any films that may be present. Slip the hole of the shorter end over the right shield post. Lay the Tear-Off across the shield and slip the other hole over the left shield post.

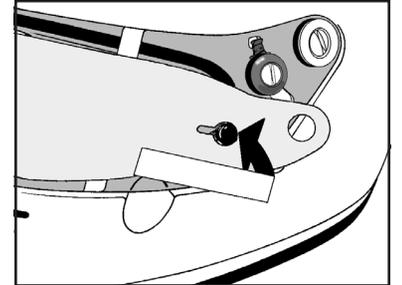


Arai Tear-Off posts are eccentrically mounted so as to be adjustable to better accept looser or tighter Tear-Offs. Adjust both posts by rotating them so that the Tear-Off is taut across the shield but not too tight so as to rip or distort the Tear-Off.

Then tighten the posts from behind with a Phillips head screwdriver while holding the posts firmly in place with your, or an assistant's fingers. The posts are loose when shipped, so be sure to tighten them before use even if the Tear-Offs fit without adjustment.

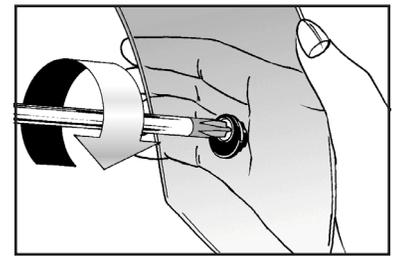

TO OPERATE TOP VENTILATION DUCTS

Push the switch on each duct to open/close the ducts as illustrated.

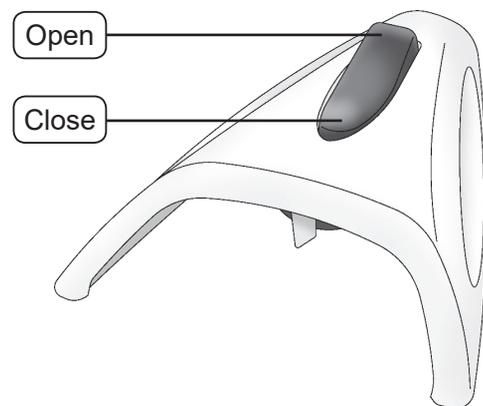

Specifications Subject to Change Without Notice.

Contacts: ARAI HELMET, LIMITED
12 Azuma-cho, 2-Chome
Ohmiya, Saitama
JAPAN 330-0841

ARAI HELMET AMERICAS, INC.
P.O. Box 787
Fogelsville, PA 18051-0787
U.S.A.

ARAI HELMET (EUROPE), B.V.
P.O. Box 112
3870 CC Hoevelaken
THE NETHERLANDS

IMPORTANT:

Do not remove any permanent Arai helmet components (such as the E.P.S., a.k.a. Styrofoam liner, chinstraps, mounting rivets/bolts or non-removable interior comfort linings) to paint an Arai helmet or for any other reason. Carefully mask trims & openings before painting.

INFORMATION

REPLACEMENT & OPTIONAL PARTS LIST:

PARTS		PART #
GP-6 SHIELD	CLEAR	011280
	DARK-TINT	011281
	LIGHT-TINT	011282
	AMBER	011283
	YELLOW	011284
GP-6 AF SHIELD	CLEAR	011290
	DARK-TINT	011291
	LIGHT-TINT	011292
GP-6 DOUBLE PANE SHIELD	CLEAR	011295
	LIGHT-TINT	011296
GP-6 TEAR-OFF SET (5 PCS / PACK)		011386
GP-6 PIVOT SCREW KIT		112403
DELTA DUCT-5 INTAKE DUCT	CLEAR	104900
	WHITE	104901

If the part you need is not listed, probably due to being from a design introduced after this instruction leaflet was printed, contact your Arai dealer or the nearest Arai representative office listed upside for current availability.