

A1 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.



AP Racing
Wheler Road
Coventry
CV3 4LB

Tel: +44 (0) 24 7663 9595
Fax: +44 (0) 24 7663 9559
e-mail: engineering@apracings.co.uk
Web site: <http://www.apracings.com>

© AP Racing Ltd. 2005

DISC PART NUMBERS:

CP3580-1034 RH AS SHOWN
CP3580-1035 LH OPPOSITE




THIS IS A 48 VANES DISC OF MASS 5523.16g

THIS DISC WAS DESIGNED TO WORK WITH A D51 DEPTH PAD.

FOR DISC MOUNTING TECHNIQUES, BEDDING PROCEDURE AND DISC COOLING RECOMMENDATIONS SEE AP RACING BRAKE DISC CATALOGUE.

GROOVE SUFFIX


G8 8 STRAIGHT GROOVES PER FACE
GA 2 SETS OF 12 J HOOK GROOVES

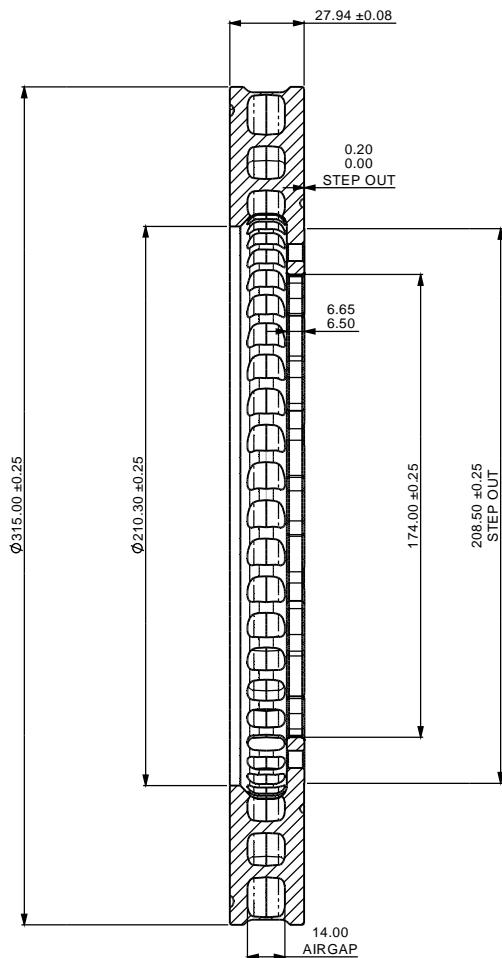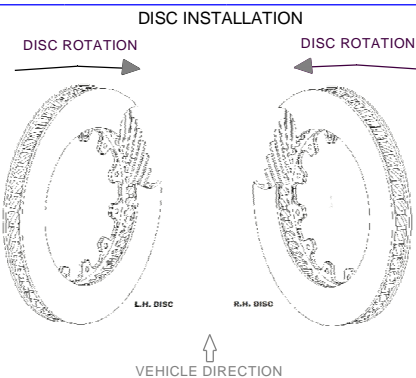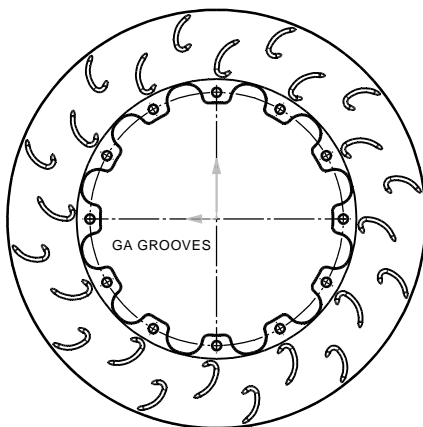

SECTION A-A

12 HOLES Ø6.45/6.40 THRO'
EQUISPACED AS SHOWN
CHAMF 0.5 x 45° BOTH SIDES

Ø190.50
P.C.D.

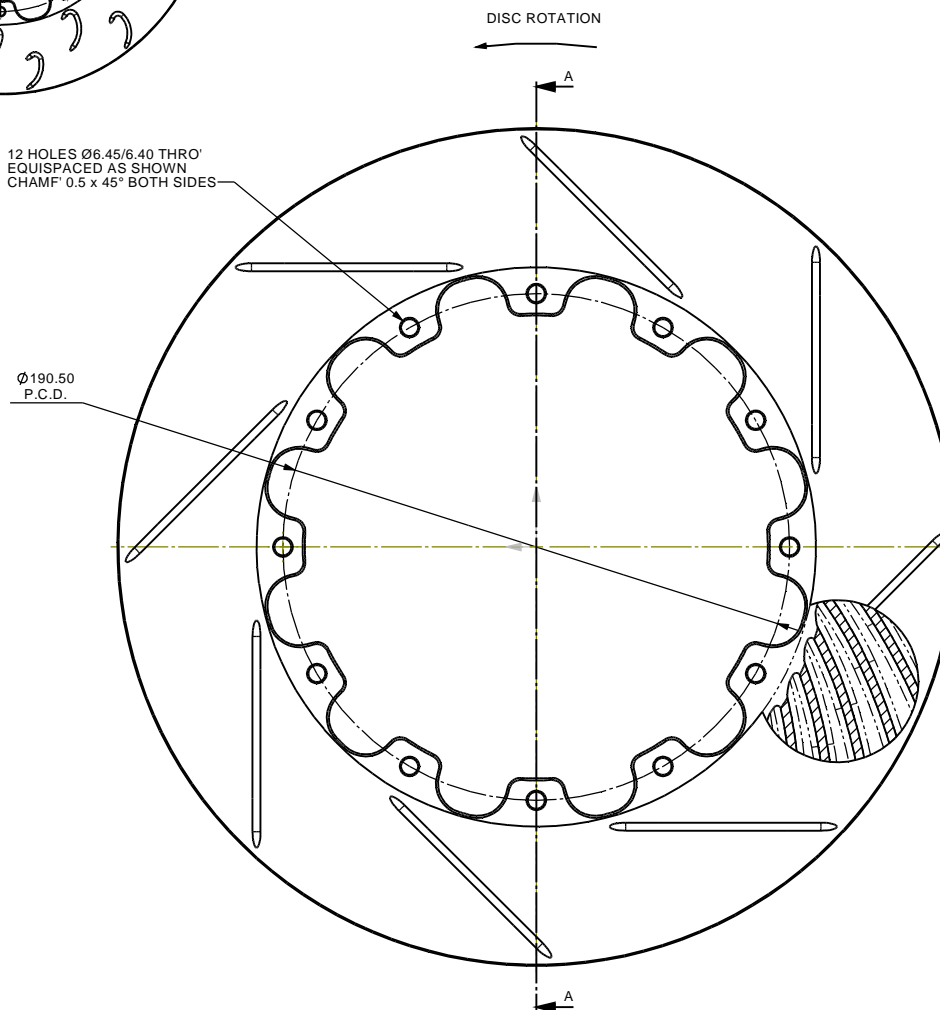

SCALE 1:1		SHEET 1 OF 1	
DRAWN	Steve Thomas		
APPROVED			
DERIVED FROM			
TITLE			
Ø315 x 27.94			
VENTILATED DISC			
DRG NO.	CP3580-1034/1035		